

4

3



2

1

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASE	8/17/2026	G Gorgonio

- NOTES:
- FACILITATES CONNECTION OF A SINGLE 4 mm PLUG TO EQUIPMENT WITH BNC FEMALE CONNECTORS.
 - MATERIAL:
 - INSULATING MATERIAL: POLYAMIDE (PA66)
 - BNC DIELECTRIC: POM
 - BNC SEAL: SILICONE RUBBER
 - BNC CONNECTOR AND BINDING POST BODY: BRASS, NICKEL PLATED
 - RATING:
 - VOLTAGE: 60 VDC / 30 VACrms(HANDHELD)
500 VDC / VACrms (NON-HANDHELD)
 - CURRENT: 3 A MAX
 - OPERATING TEMPERATURE: 0 °C TO +60 °C
 - CE AND REACH COMPLIANT

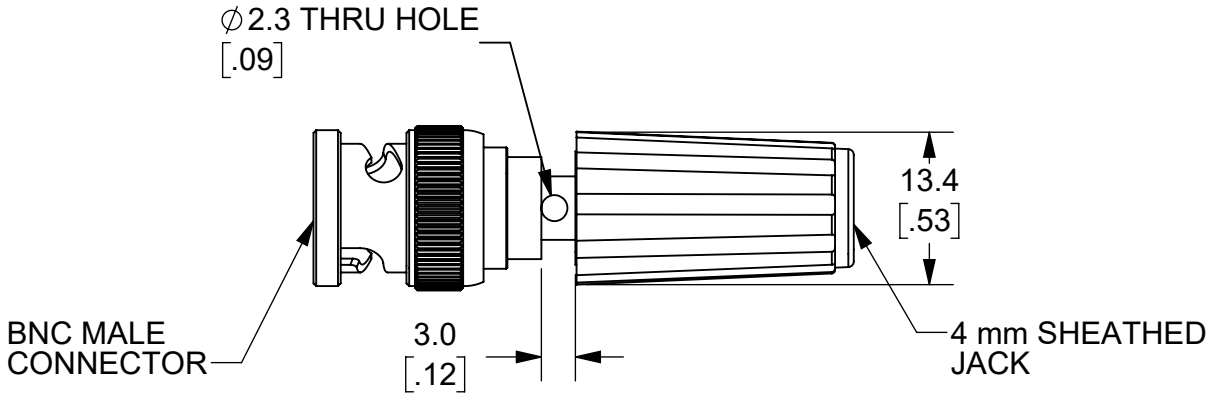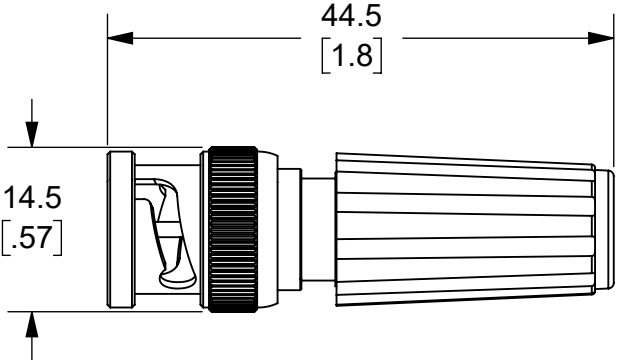


PART NUMBER
CT4592 - #

COLOR: 0 - BLACK
2 - RED

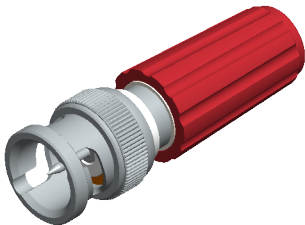

ISOMETRIC VIEW
FULL SCALE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING		PROJECT NO. A870		METRIC		Cal TestELECTRONICS		22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA					
				MATERIAL SEE NOTES		APPROVALS		DATE		TITLE ADAPTER, BNC MALE CONNECTOR /4mm JACK BINDING POST					
		TREATMENT NONE		DRAWN MARK LIU		8/6/2026									
REFERENCE		FINISH SEE NOTES		CHECKER GSG		8/6/2026		SIZE B		CAGE CODE 43F45		DWG. NO. CT4592		REV. A	
				ENGR. B HANSEN		8/6/2026									
				DESIGN ACTIVITY		8/6/2026		SCALE 2:1				SHEET 1 OF 1			