

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

1. MATERIAL:
BODY: SANTOPRENE
PLUG: BRASS, NICKEL PLATED
CONTACT: BeCu, NICKEL PLATED


2. RATING:
IEC RATING: 33 VAC / 70 VDC
VOLTAGE MAX: 1200 VAC / VDC
CURRENT MAX: 36 A
TEMPERATURE: -20 °C TO +80 °C

3. MAXIMUM WIRE SIZE:
CONDUCTOR: Ø 1.9mm [.075] (13 AWG)
INSULATION: Ø 4.0mm [.16]
STRIP LENGTH: 6.4mm [.25]


4. RoHS 2 COMPLIANT.

ASSEMBLY INSTRUCTIONS:

1. SLIDE WIRE THROUGH INSULATOR HOUSING.
2. STRIP WIRE 6.4mm [.25"].
3. INSERT STRIPPED WIRE INTO PLUG ASSEMBLY.
4. TIGHTEN FIRST SET-SCREW (CONDUCTOR).
5. FOR SET-SCREWS, USE 1.5mm ALLEN WRENCH (CAL TEST P/N CT2919).
6. SNUG SECOND SET-SCREW ON WIRE INSULATION.
7. PUSH PLUG ASSEMBLY INTO INSULATOR HOUSING.

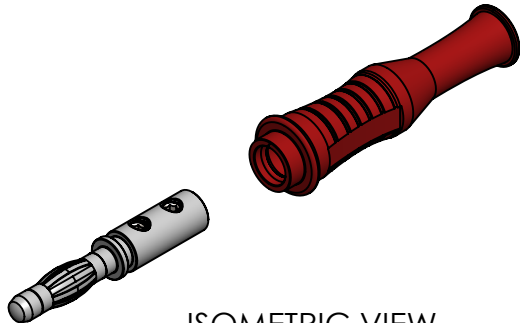

ISOMETRIC VIEW
PRE-ASSEMBLY

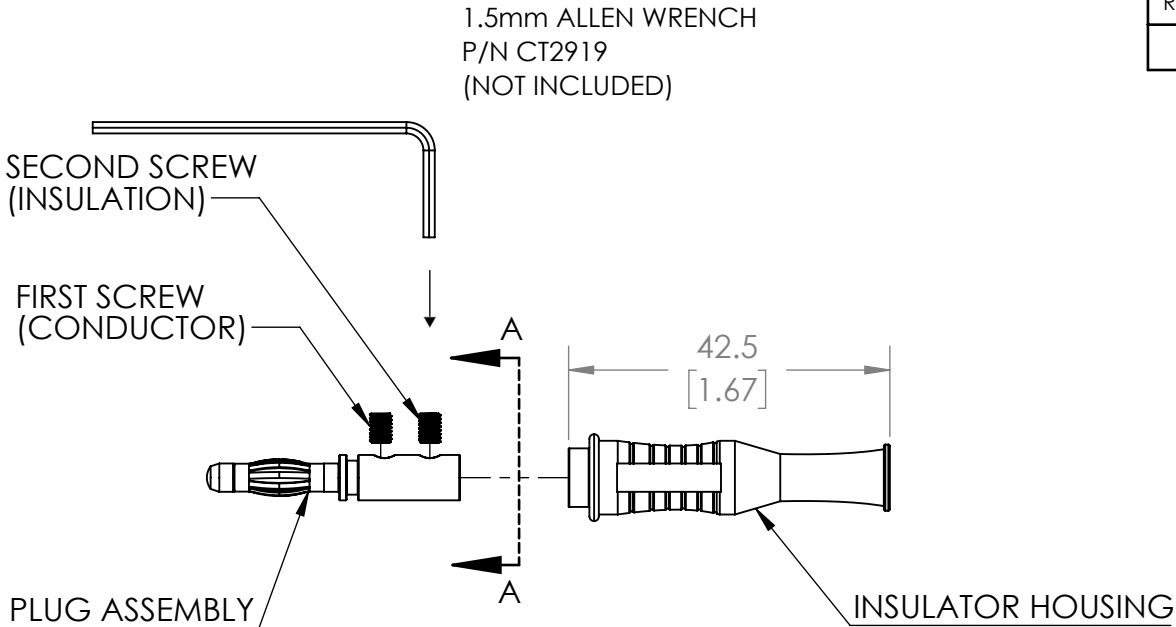

ASSEMBLED

CT3276-9	WHITE	-
CT3276-6	BLUE	-
CT3276-5	GREEN	-
CT3276-4	YELLOW	-
CT3276-2	RED	-
CT3276-0	BLACK	-
PART NUMBER	CONFIGURATION	NOTES / REFERENCE

PART NUMBER TABLE

THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING		PROJECT NO.		METRIC		Cal TestELECTRONICS		22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA					
			APPROVALS		DATE		TITLE 4mm BANANA PLUG, SOLDERLESS							
			DRAWN G. GORGONIO		11/24/2021									
			MATERIAL SEE NOTES		CHECKER B. HANSEN		11/24/2021							
	TREATMENT N/A		ENGR. B. HANSEN		11/24/2021		SIZE B		CAGE CODE 43F45		DWG. NO. CT3276		REV. A	
	FINISH SEE NOTES		DESIGN ACTIVITY				SCALE 1:1				SHEET 1 OF 1			