





THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

- MATERIAL:
INSULATOR: POLYAMIDE (NYLON)
JACK: BRASS, Ni PLATED
HEX NUT: BRASS, Ni PLATED.
- RATING:
VOLTAGE: 1000 V CAT IV / 5 kV NON-CATEGORY WITH 2 kV TRANSIENT OVERVOLTAGE
CURRENT: 10 A MAX
TEMPERATURE: -20°C TO +80°C.
- INSULATOR THREAD: M12 X 0.75
MAXIMUM TORQUE: 2.3 N-m (1.7 ft-lb) @ 20°C.
- MAXIMUM PANEL THICKNESS: 10 mm (.39").
- HEX NUT REPLACEMENT: CT2897.
- RoHS 2 COMPLIANT.
- DESIGNED FOR AND INTENDED TO BE USED ONLY WITH CT3018 OR CT3020.

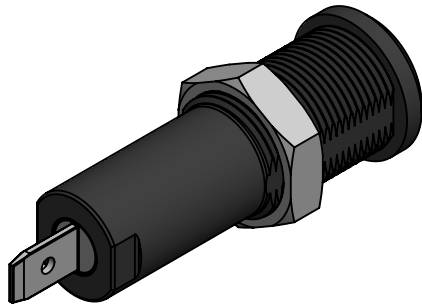


ISOMETRIC VIEW

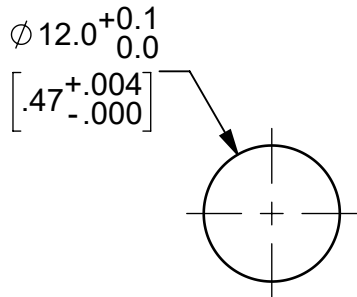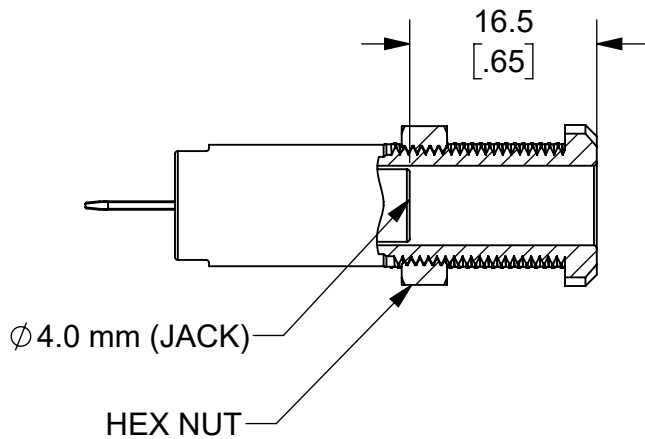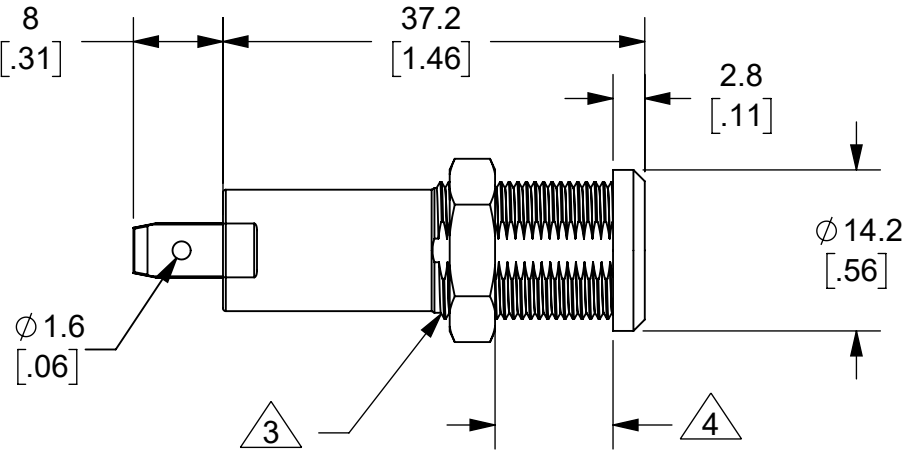

PANEL MOUNT HOLE

CT4008-2	RED	-
CT4008-0	BLACK	-
PART NUMBER	CONFIGURATION	NOTES / REFERENCE

PART NUMBER TABLE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING	PROJECT NO.		METRIC		Cal TestELECTRONICS		22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA		
	MATERIAL SEE NOTES		APPROVALS	DATE	TITLE 4mm SHEATHED JACK, PANEL MOUNT w/4.8mm QUICK CONNECT						
			DRAWN G.S.G	4/20/2022							
			CHECKER B. HANSEN	4/20/2022							
	REFERENCE		TREATMENT N/A		ENGR. B. HANSEN	4/20/2022	SIZE B	CAGE CODE 43F45	DWG. NO. CT4008		REV. A
FINISH SEE NOTES		DESIGN ACTIVITY									
				SCALE 2:1				SHEET 1 OF 1			