






THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

1. MATERIAL:
INSULATOR: POLYPROPYLENE (PP)
JACK: BRASS, Ni PLATED
HEX NUT: BRASS, Ni PLATED.
2. RATING:
VOLTAGE: 1000 V CAT IV / 5 kV NON-CATEGORY WITH 2 kV TRANSIENT OVERVOLTAGE
CURRENT: 10 A MAX.
- 3


 INSULATOR THREAD: M12 X 0.75.
- 4

 MAXIMUM PANEL THICKNESS: 10 mm (.39").
5. HEX NUT REPLACEMENT: CT2897.
6. RoHS 2 COMPLIANT.
7. DESIGNED FOR AND INTENDED TO BE USED ONLY WITH CT3018 OR CT3020.

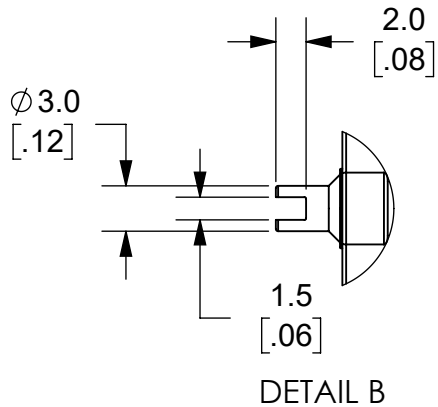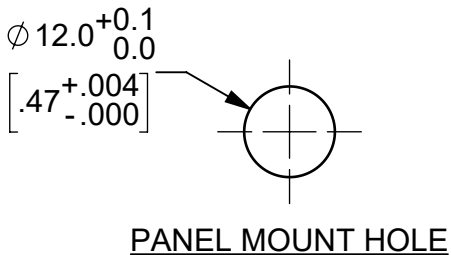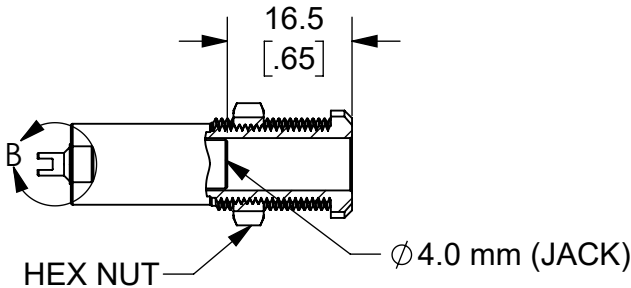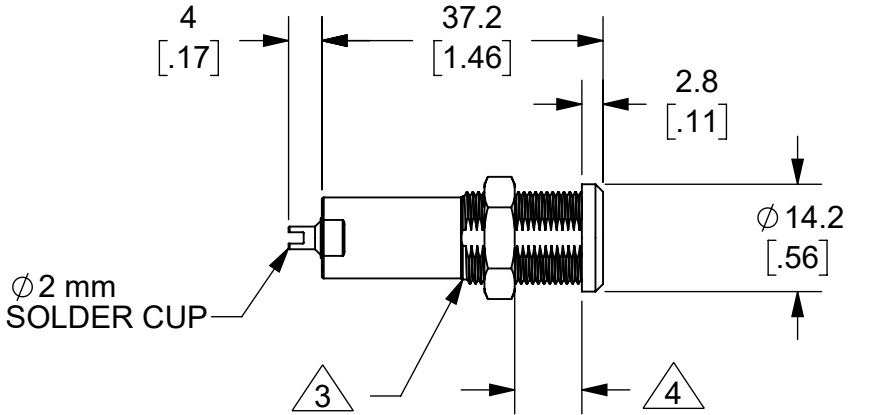

ISOMETRIC VIEW

CT4407-2	RED	-
CT4407-0	BLACK	-
PART NUMBER	CONFIGURATION	NOTES / REFERENCE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING MATERIAL SEE NOTES TREATMENT N/A FINISH SEE NOTES		PROJECT NO.		METRIC		Cal TestELECTRONICS		22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA		
REFERENCE				APPROVALS		DATE		TITLE 4mm SHEATHED JACK, PANEL MOUNT 2mm SOLDER CUP w/SLOT				
				DRAWN G.S.G.		1/13/2022						
				CHECKER B. HANSEN		1/26/2022						
				ENGR. B. HANSEN		1/13/2022		SIZE B	CAGE CODE 43F45		DWG. NO. CT4407	
DESIGN ACTIVITY				SCALE 2:1				SHEET 1 OF 1				