



THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

1. BNC MALE WITH 4 mm BANANA PLUGS
APPLICATION: ADAPTS BNC FEMALE CONNECTOR TO 4 mm BANANA PLUGS TO CONNECT TO DUAL BANANA JACKS.
2. SPECIFICATIONS:
INSULATOR: POLYAMIDE (NYLON), BLACK
BANANA PLUG CONTACTS: PHOS. BRONZE, NICKEL PLATED
BNC(m): BRASS. CENTER CONTACT, GOLD PLATED.
3. RATING:
VOLTAGE: 500 V
CURRENT: 3 A MAX.
RESISTANCE: <0.8 mΩ.
TEMPERATURE: -20° C TO +80° C.
4. STANDARD PACKAGING: 5 PCS PER PACK.
5. RoHS 2 COMPLIANT.

PART NUMBER
CT2940

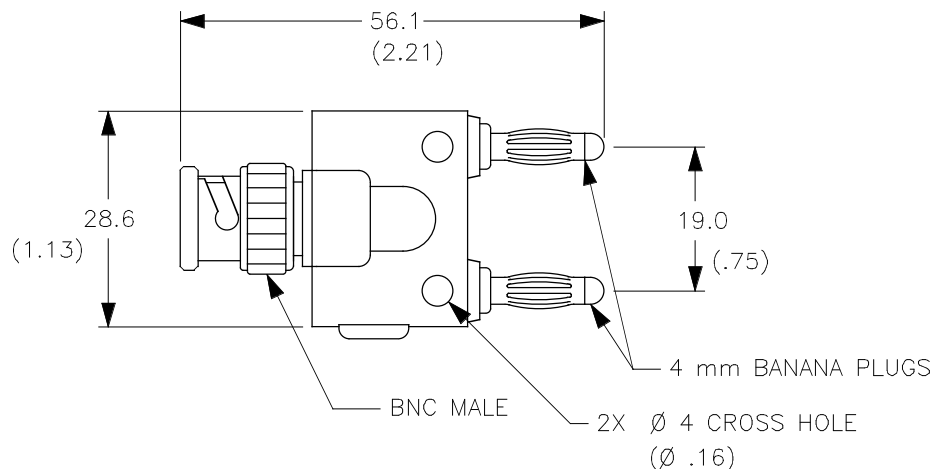

SCHEMATIC

METRIC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLE .X ± 0.8 ± 2° .XX ± 0.25 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
	MATERIAL	APPROVALS	DATE	TITLE			
THIRD ANGLE PROJECTION	FINISH	DRAWN WDH	7/12/99	BNC(m) w/4 mm BANANA PLUGS			
		CHECKED		SIZE	CAGE CODE	DWG. NO.	REV.
		ENGR.		A	43F45	P294000	A
		DESIGN ACTIVITY		SCALE	1:1	SHEET 1 OF 1	