


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

1. BNC MALE WITH 4 mm BINDING POST
APPLICATION: ADAPTS BNC FEMALE CONNECTOR TO 4 mm BINDING POST TO ACCEPT SPADE LUGS, WIRES AND BANANA PLUGS.
2. SPECIFICATIONS:
INSULATOR: DELRIN, NATURAL
BINDING POSTS CONTACT: BRASS, NICKEL PLATED
BNC(m): BRASS. CENTER CONTACT, NICKEL PLATED.
3. RATING:
VOLTAGE: 500 V
CURRENT: 3 A MAX.
RESISTANCE: <0.8 mΩ.
TEMPERATURE: -20° C TO +80° C.
4. STANDARD PACKAGING: 5 PCS PER PACK.
5. RoHS 2 COMPLIANT.

PART NUMBER

CT3161-#

COLOR: **-0** BLACK
-2 RED

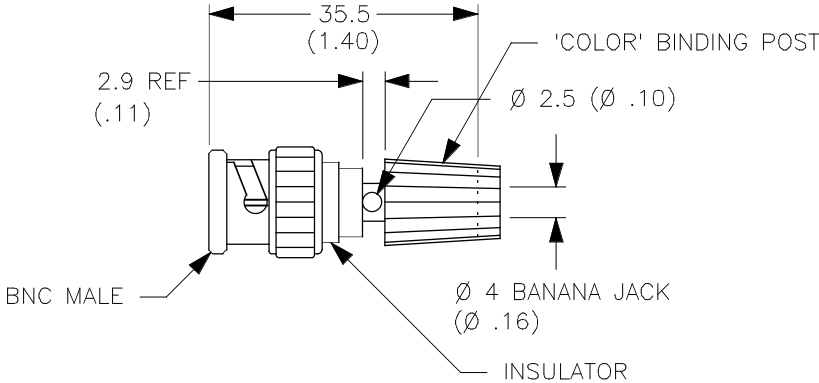

BNC MALE ← 'COLOR' BINDING POST

SCHEMATIC

METRIC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLE .X ± 0.8 ± 2° .XX ± 0.25 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
		APPROVALS	DATE	TITLE			
THIRD ANGLE PROJECTION	MATERIAL	DRAWN	WDH	BNC(m) w/4 mm BINDING POST			
		CHECKED					
	FINISH	ENGR.		SIZE	CAGE CODE	DWG. NO.	REV.
		DESIGN ACTIVITY		A	43F45	P316100	A
				SCALE	1:1	SHEET	1 OF 1