

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	1/6/17	

NOTES:

1. MATERIAL:

CENTER CONTACT: BERYLLIUM COPPER, GOLD OVER NICKEL
 BODY & COUPLING NUT: BRASS, NICKEL PLATED
 DIELECTRIC: PTFE


2. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: DC TO 4 GHz
 VSWR (MAX): 1.30:1
 OPERATING TEMPERATURE: -40° C TO +120° C


3. RoHS 2 COMPLIANT; EXEMPTION ANNEX III 6(c).

4. PACKAGING:

INDIVIDUAL, 1 PCS PER BAG.
 WEIGHT: 13.3 g/pc.

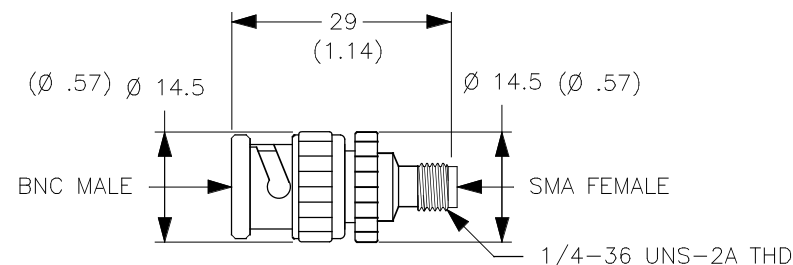

PART NUMBER
CT3328

METRIC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLE .X ± 0.8 ± 2° .XX ±0.25 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610				
		APPROVALS	DATE	TITLE				
THIRD ANGLE PROJECTION	MATERIAL	DRAWN	WDH	1/5/17	ADAPTER, COAXIAL, GENERAL PURPOSE GRADE, BETWEEN—SERIES, BNC MALE TO SMA FEMALE			
	CHECKED							
	FINISH	ENGR.			SIZE	CAGE CODE	DWG. NO.	REV.
		DESIGN ACTIVITY			A	43F45	P332800	—
					SCALE	1:1		SHEET 1 OF 1