

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASE	1/15/2019	
B	UPDATED PLASTIC BODY MATERIAL: WAS ABS IS POLYETHYLENE	7/23/2025	B. Hansen

NOTES

1. MATERIAL:
1. BANANA PLUG CONTACT: BECU

2. BANANA PLUG BODY & SET SCREW: BRASS

3. PLATING: NICKEL

4. PLASTIC BODY: POLYETHYLENE
2. SPECIFICATIONS:
1. VOLTAGE: (NON-HANDHELD)

1. IEC: 30 VAC / 60 VDC

2. MAX: 5,000 VDC



2. CURRENT (MAX): 15 A

3. TEMPERATURE: 0°C TO +50°C

4. WIRE SIZE: (CROSS HOLES)


1. 18 - 22 AWG

2. REQUIRES SMALL BLADE SCREWDRIVER TO TIGHTEN SET-SCREWS
3. ROHS COMPLIANT

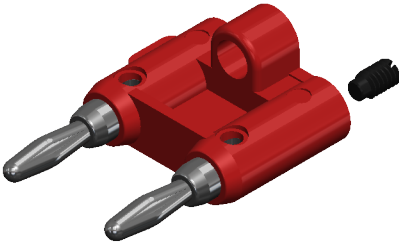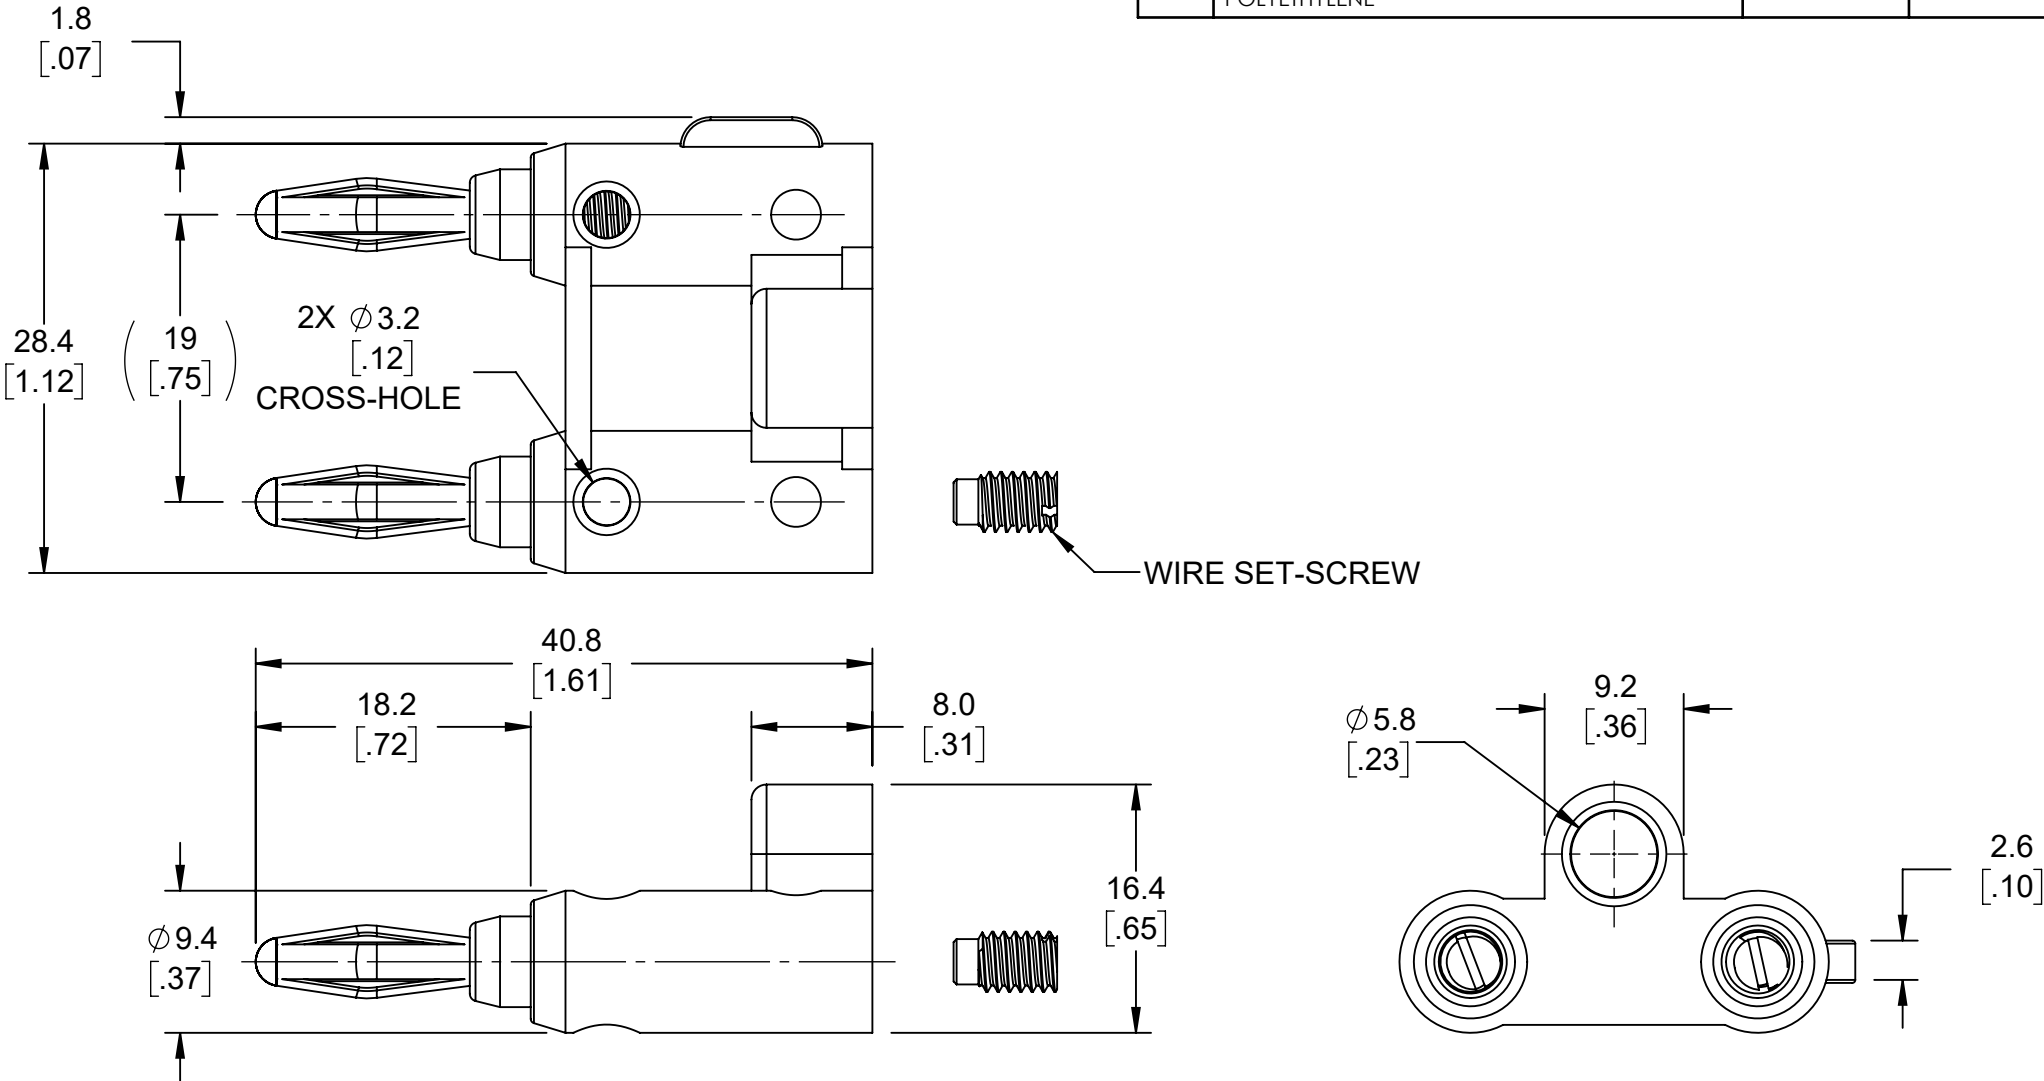

ISOMETRIC VIEW

CT3160-2	DOUBLE BANANA PLUG, RED	-
CT3160-0	DOUBLE BANANA PLUG, BLACK	-
PART NUMBER	CONFIGURATION	NOTES / REFERENCE

THIRD ANGLE PROJECTION		PROJECT NO. N/A		METRIC		Cal Test ELECTRONICS 22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA							
		APPROVALS		DATE		TITLE 4mm DOUBLE BANANA PLUG, DIY							
		DRAWN WDH		1/15/2019									
		CHECKER B.Hansen		1/15/2019									
		ENGR. B. Hansen		1/15/2019									
REFERENCE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING		DESIGN ACTIVITY		SIZE B		CAGE CODE 43F45		DWG. NO. CT3160		REV. B	
		MATERIAL SEE NOTES											
		TREATMENT NONE											
		FINISH SEE NOTES											