

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/12/01	


1. 4mm HIGH VOLTAGE BANANA PLUGS TEST LEAD, PVC HV WIRE
2. SPECIFICATIONS:
- WIRE:
DOUBLE INSULATED PVC (−20° C TO +80° C)
STRANDED BARE COPPER, (0.50mm²) CROSS SECTION, Ø 4.0±0.2 (Ø .16±.008) O.D.
- INSULATED HOUSING:
PA6 (NYLON) THERMOPLASTIC.
UL94V−0.
- CONTACT:
4 mm, BeCu, NICKEL PLATED.
PLUG BODY: BRASS, NICKEL PLATED.
3. RATING:
VOLTAGE: 5,000V CAT I (IEC 61010−1), 2 kV TRANSENT OVERVOLTAGES
CURRENT: 10 A MAX.
TEMPERATURE: −20°C TO +80°C.

PART NUMBER


CT3020−L−#

COLOR: 0 − BLACK
2 − RED

LENGTH: (CENTIMETERS)
STANDARDS: 100, 150

METRIC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLE .X ± 0.8 ± 2° .XX ± 0.25 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
		APPROVALS	DATE	TITLE			
THIRD ANGLE PROJECTION	MATERIAL	DRAWN WDH	7/12/01	LEAD, 4mm HV PLUGS, PVC HV WIRE			
		CHECKED					
	FINISH	ENGR.		SIZE A	CAGE CODE 43F45	DWG. NO. P302000	REV. —
		DESIGN ACTIVITY					
				SCALE NONE			SHEET 1 OF 2

THIS IS ISSUED IN STRICT CONFIDENCE THAT
IT IS NOT USED AS A BASIS FOR
MANUFACTURE OR SALE AND THAT IT IS NOT
COPIED, REPRINTED OR DISCLOSED TO A THIRD
PARTY EITHER WHOLLY OR IN PART WITHOUT
THE PRIOR WRITTEN CONSENT OF CAL TEST
ELECTRONICS, INC.

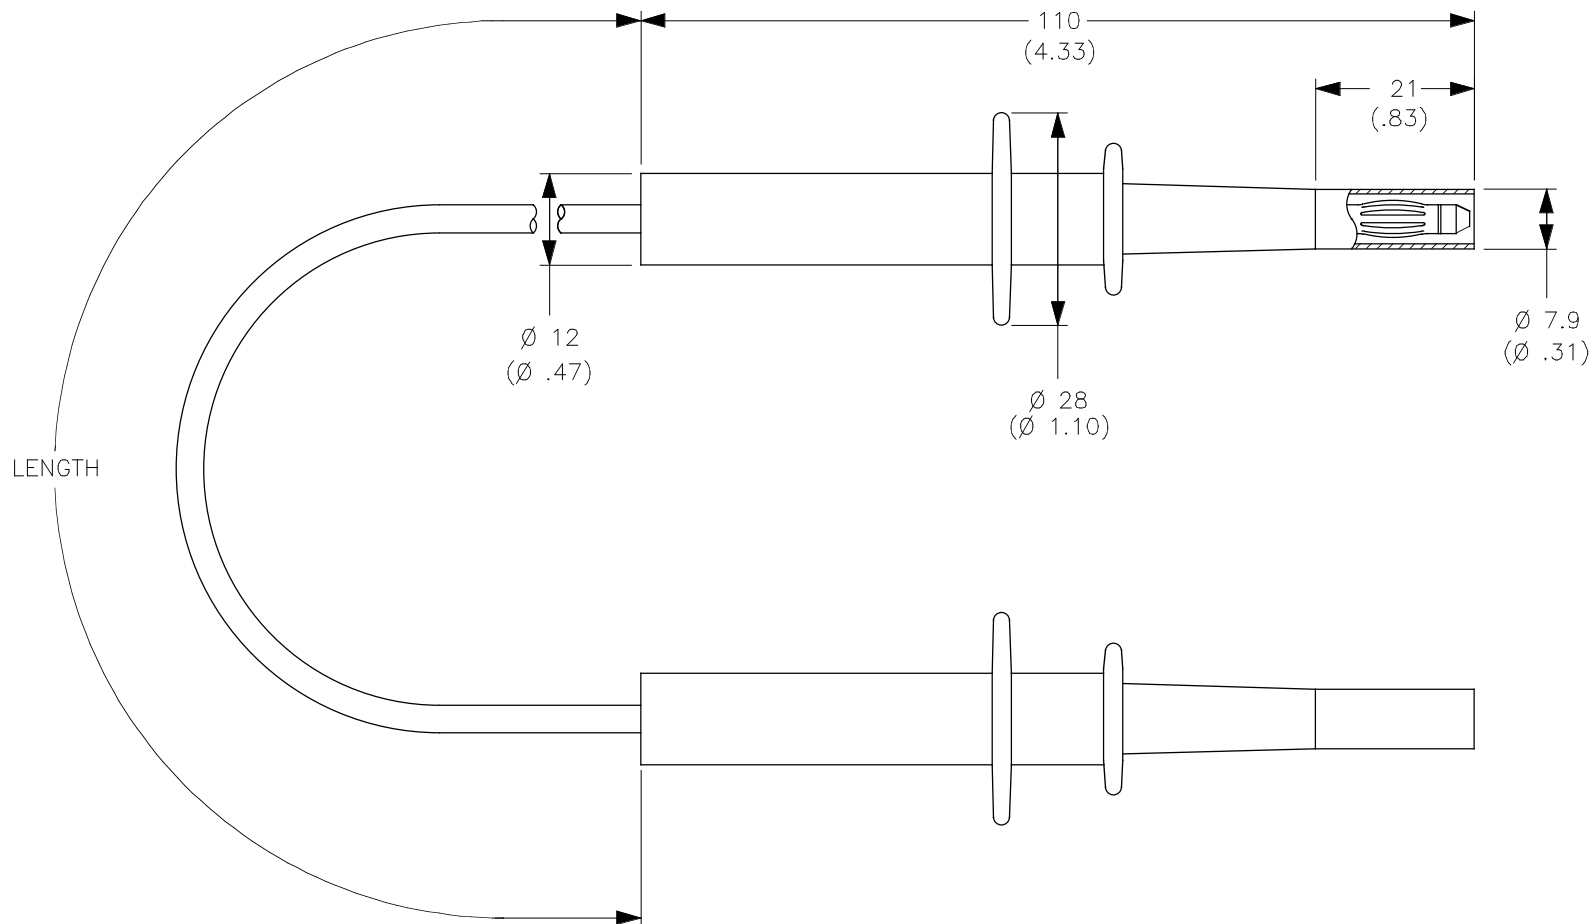

DRAWN		7/12/01	SIZE	CAGE CODE	DWG. NO.	P302000	REV.
WDH			A				—
CHECKED			SCALE	1:1		SHEET	2 OF 2