
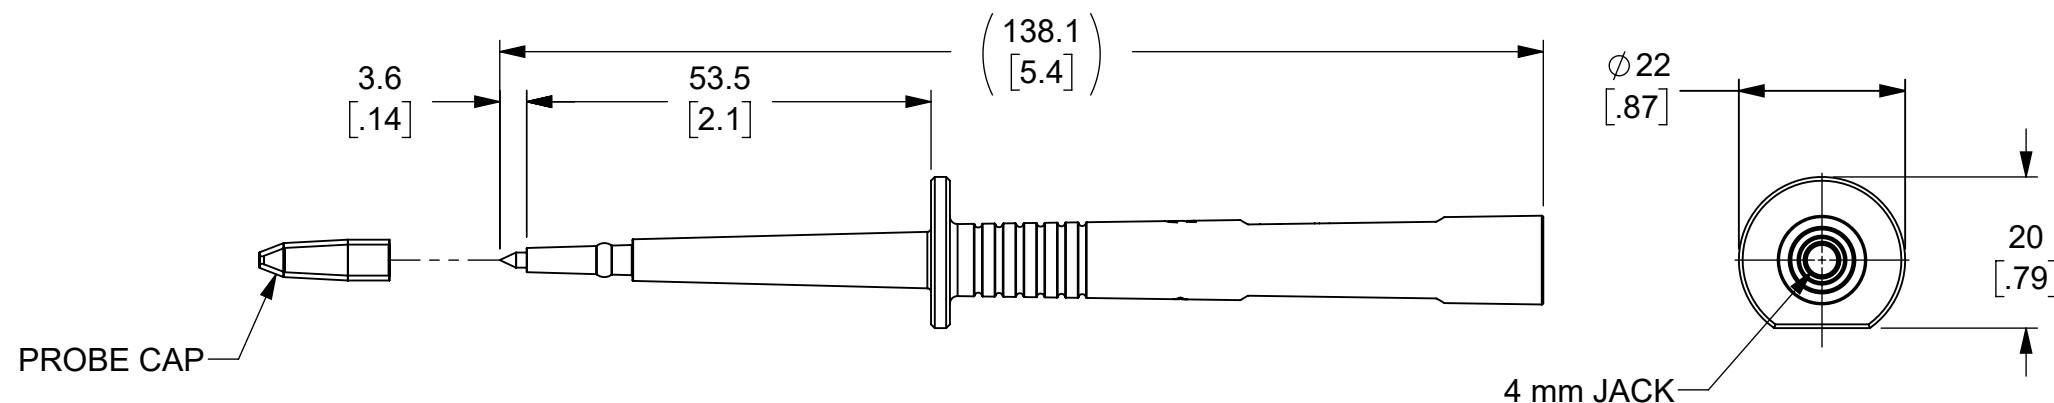


D

NOTES:

1. ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
2. MATERIAL:
 1. INSULATOR: POLYPROPYLENE.
 2. CAP: POLYPROPYLENE, CLEAR.
 3. CONTACT: STAINLESS STEEL, PASSIVATED.
3. ELECTRICAL:
 1. VOLTAGE: 1500 VDC CAT III / 1000 V CAT IV.
 2. CURRENT: 16 A.
4. MECHANICAL:
 1. TEMPERATURE RANGE: -20°C TO +60°C.
5. RoHS 2 COMPLIANT.


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASED	8/14/2024	
B	NOTE 3, WAS BRASS NICKEL PLATED.	4/16/2025	

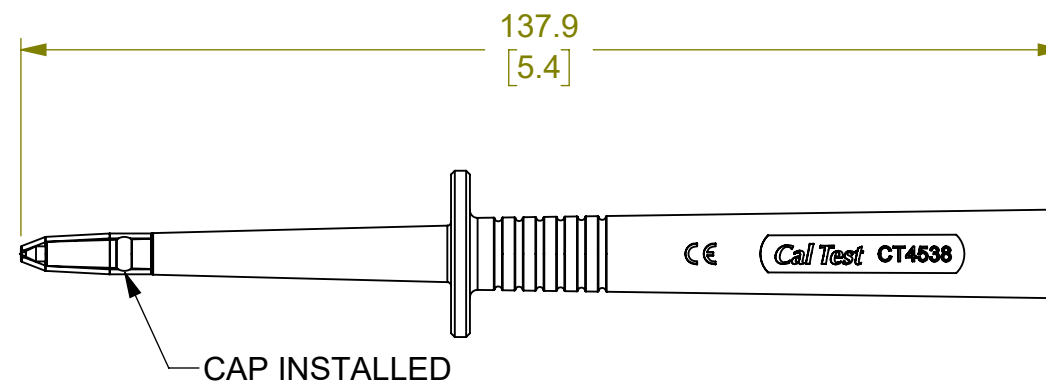


MODEL NUMBER

CT4538 - #

—COLOR:
0 - BLACK
2 - RED

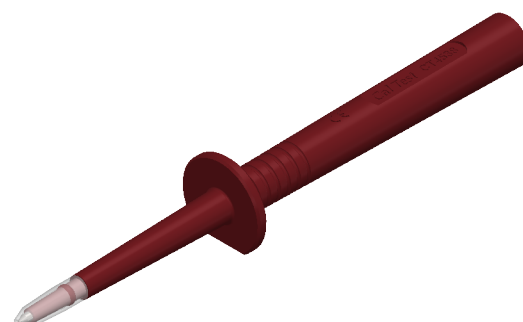

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING		PROJECT NO. A804d		METRIC		Cal Test ELECTRONICS 22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA					
				APPROVALS		DATE		TITLE DMM PROBE, EXTENDED, 2mm FINE TIP					
REFERENCE		MATERIAL SEE NOTES		DRAWN GSG		8/14/2024							
				CHECKER B. HANSEN		8/14/2024							
		TREATMENT NONE		ENGR. B. HANSEN		8/14/2024		SIZE B		CAGE CODE 43F45		DWG. NO. CT4538	
FINISH SEE NOTES		DESIGN ACTIVITY				SCALE 1:2		SHEET 1 OF 1					

A

A

B

B

C

C

D

D

4

3

2

1