
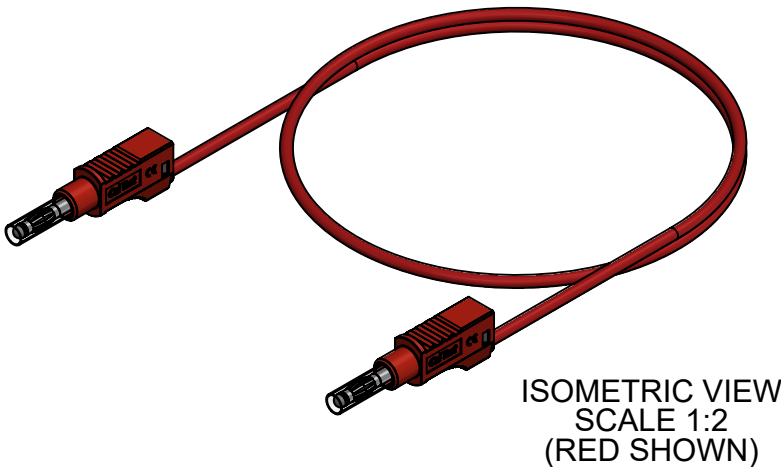


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASED	11/21/2023	B. Hansen
B	ADDED TEST LEAD SPECIFICATIONS, UL STYLE NO. 3239, AWM, VW-1, UL 758, CULUS.	11/30/2023	B. HANSEN


- NOTES:
- 4 mm RETRACTABLE STACKING BANANA PLUG LEAD ASSEMBLY.
 - SPECIFICATIONS:
 - 4 mm BANANA PLUG
 - PLUG BODY: BRASS, NICKEL PLATING
 - CONTACT: BeCu, NICKEL PLATING
 - INSULATOR: POLYPROPYLENE
 - SLEEVE: POLYPROPYLENE
 - TEST LEAD: SILICONE JACKETED, DOUBLE INSULATED, BARE COPPER, STRANDING 651x0.07mm, (7x93x0.07), 2.50mm², 13AWG. (UL STYLE NO. 3239 AWM, VW-1, UL 758, cULus).
 - COLOR - SEE MODEL NUMBER.
 - RATING:
 - IEC VOLTAGE: 600 V CAT II
 - CURRENT: 36 A MAX.
 - TEMPERATURE: -20° TO +80°C
 - RoHS 2 COMPLIANT.

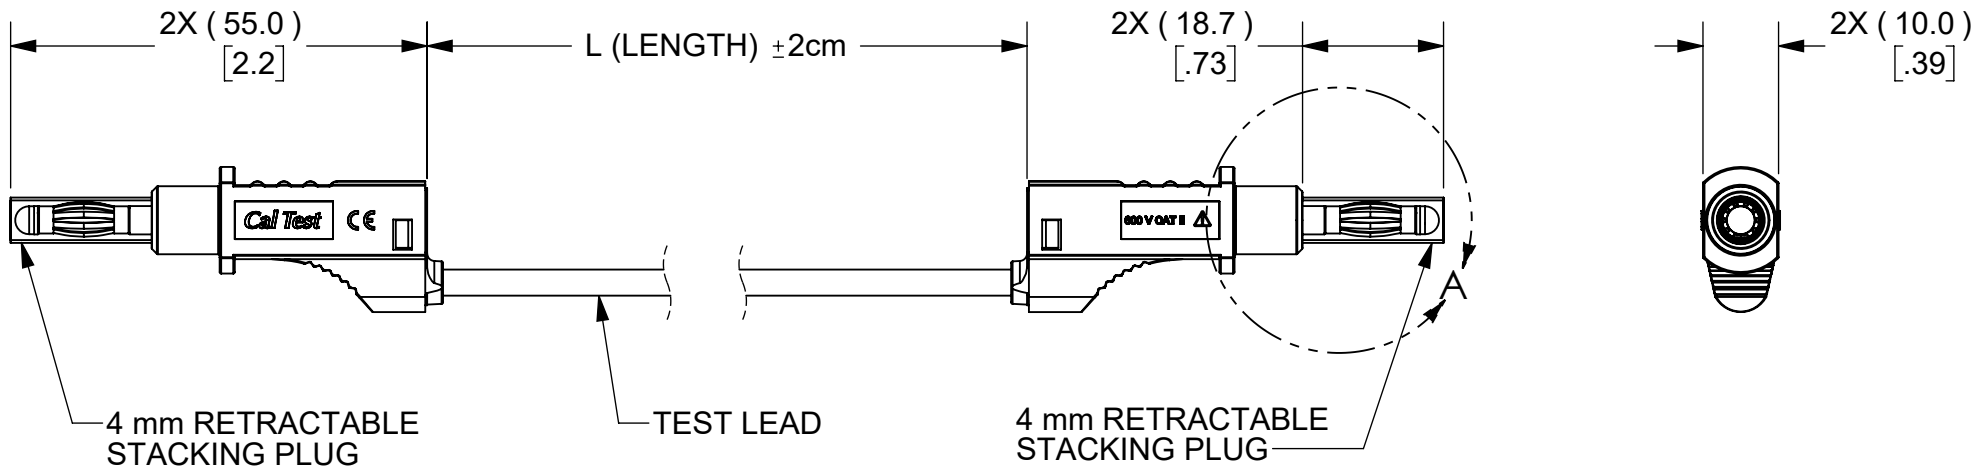

MODEL NUMBER
CT2151-L- #

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

LENGTH: (cm)

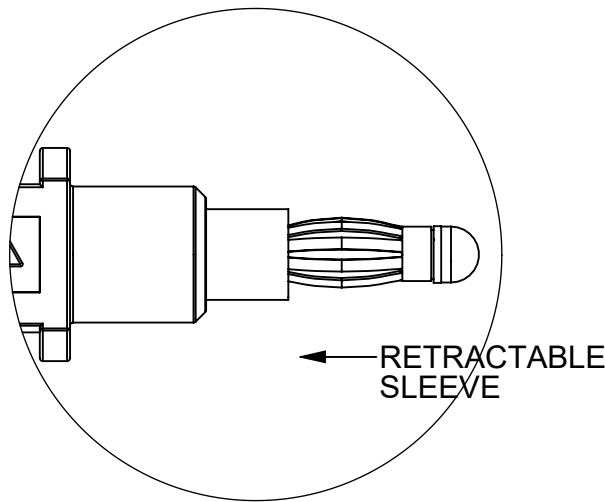

THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING	PROJECT NO. A645(b)		METRIC Cal Test ELECTRONICS 22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA
		APPROVALS	DATE	
REFERENCE	MATERIAL SEE NOTES	DRAWN GSG	10/18/2023	TITLE 4mm STACKING RETRACTABLE BANANA PLUG TEST LEAD, SILICONE JACKET
	TREATMENT NONE	CHECKER B. HANSEN	10/18/2023	
	FINISH SEE NOTES	ENGR. B. HANSEN	10/18/2023	
		DESIGN ACTIVITY		SIZE B
				CAGE CODE 43F45
				DWG. NO. CT2151
				REV. B
		SCALE 1:1		SHEET 1 OF 1