


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASED	10/19/2023	B. Hansen
B	ADDED TEST LEAD SPECIFICATIONS, UL STYLE NO. 3239 AWM, VW-1, UL 758, CULUS; REVISED LEAD STRANDING WAS 195X0.07.	11/30/2023	B. HANSEN



- NOTES:
- 4 mm RETRACTABLE STACKING BANANA PLUG LEAD ASSEMBLY.
 - SPECIFICATIONS:
 - 4 mm BANANA PLUG
 - PLUG BODY: BRASS, NICKEL PLATING
 - CONTACT: BeCu, NICKEL PLATING
 - INSULATOR: POLYPROPYLENE
 - SLEEVE: POLYPROPYLENE
 - TEST LEAD: SILICONE JACKETED, DOUBLE INSULATED, BARE COPPER, STRANDING 192x0.071mm, 0.75mm², 18AWG. (UL STYLE NO. 3239 AVM, VM-1, UL 758, cULus). COLOR - SEE MODEL NUMBER.
 - RATING:
 - IEC VOLTAGE: 600 V CAT II
 - CURRENT: 12 A MAX.
 - TEMPERATURE: -20° TO +80°C
 - RoHS 2 COMPLIANT.

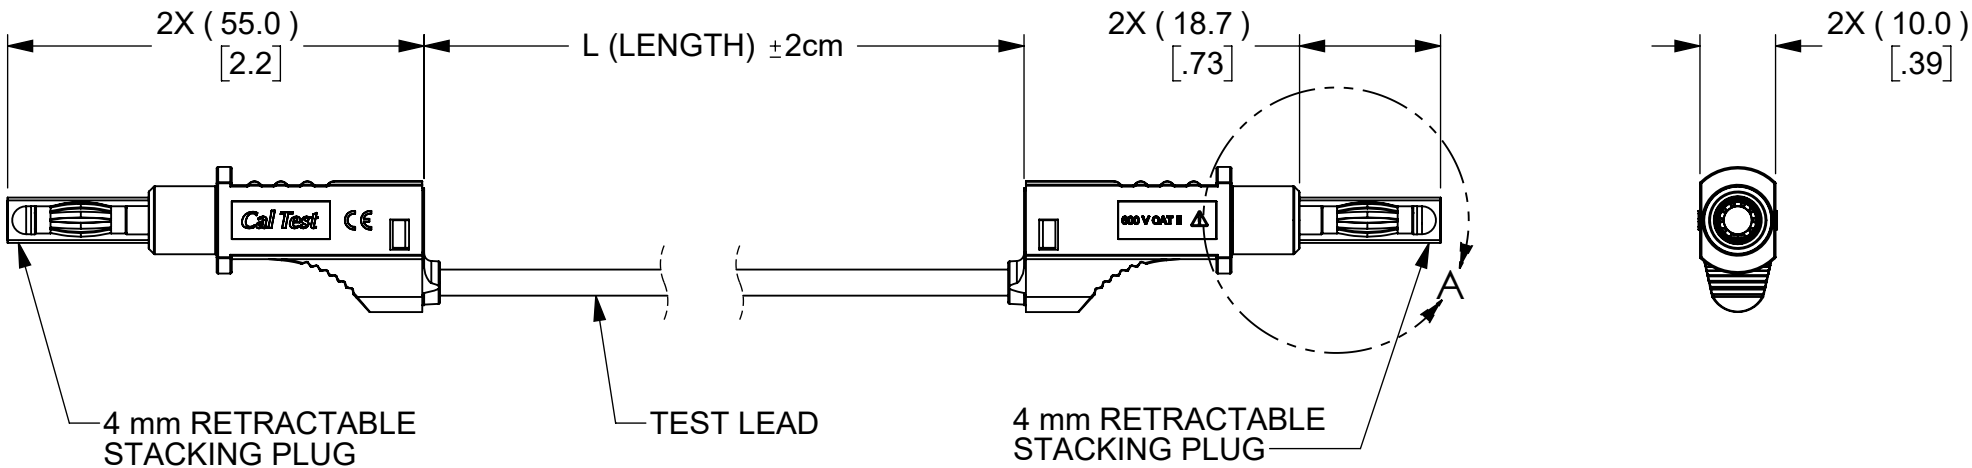

MODEL NUMBER
CT2148-L- #

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

LENGTH: (cm)

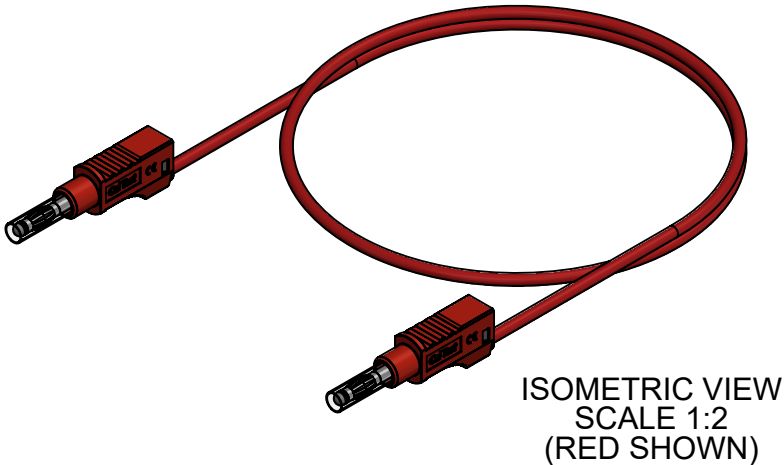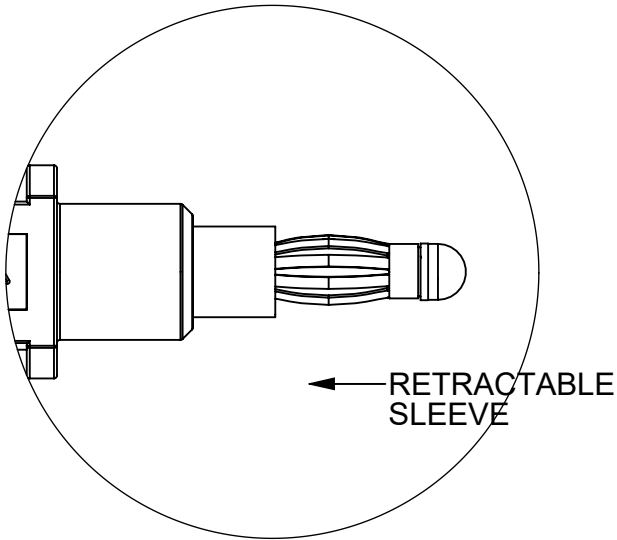

THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING	PROJECT NO. A645(b)		METRIC  22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA	
		APPROVALS	DATE	TITLE 4mm STACKING RETRACTABLE BANANA PLUG TEST LEAD, SILICONE JACKET	
REFERENCE	MATERIAL SEE NOTES	DRAWN GSG	10/18/2023	SIZE B	CAGE CODE 43F45
	TREATMENT NONE	CHECKER B. HANSEN	10/18/2023	DWG. NO. CT2148	REV. B
	FINISH SEE NOTES	ENGR. B. HANSEN	10/18/2023	SCALE 1:1	SHEET 1 OF 1