


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

- NOTES:
- 4 mm STACKING BANANA PLUG LEAD ASSEMBLY.
 - SPECIFICATIONS:
 - 4 mm BANANA PLUG:
 - PLUG BODY: BRASS, NICKEL PLATED
 - CONTACT: BeCu, NICKEL PLATED
 - INSULATOR: POLYPROPYLENE
 - TEST LEAD: SILICONE JACKETED, DOUBLE INSULATED, BARE COPPER, STRANDING 192x0.071mm, 0.75mm², 18AWG. (UL STYLE NO. 3239 AVM, VM-1, UL 758, cULus). COLOR - SEE MODEL NUMBER.
 - RATING:
 - IEC VOLTAGE: 30 VAC / 60 VDC
 - VOLTAGE MAX: 1200 V AC/DC
 - CURRENT: 12 A MAX.
 - TEMPERATURE: -20 TO +80 °C
 - RoHS 2 COMPLIANT.


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASED	10/19/2023	B. Hansen
B	ADDED TEST LEAD SPECIFICATIONS, UL STYLE NO. 3239 AWM, VW-1, UL 758, CULUS; REVISED LEAD STRANDING WAS 195X0.07.	11/30/2023	B. Hansen
C	REVISED NOTE 3. RATING: IEC VOLTAGE WAS 33 VAC / 70 VDC, MATCHING NEW SPECIFICATION.	1/25/2024	B. HANSEN

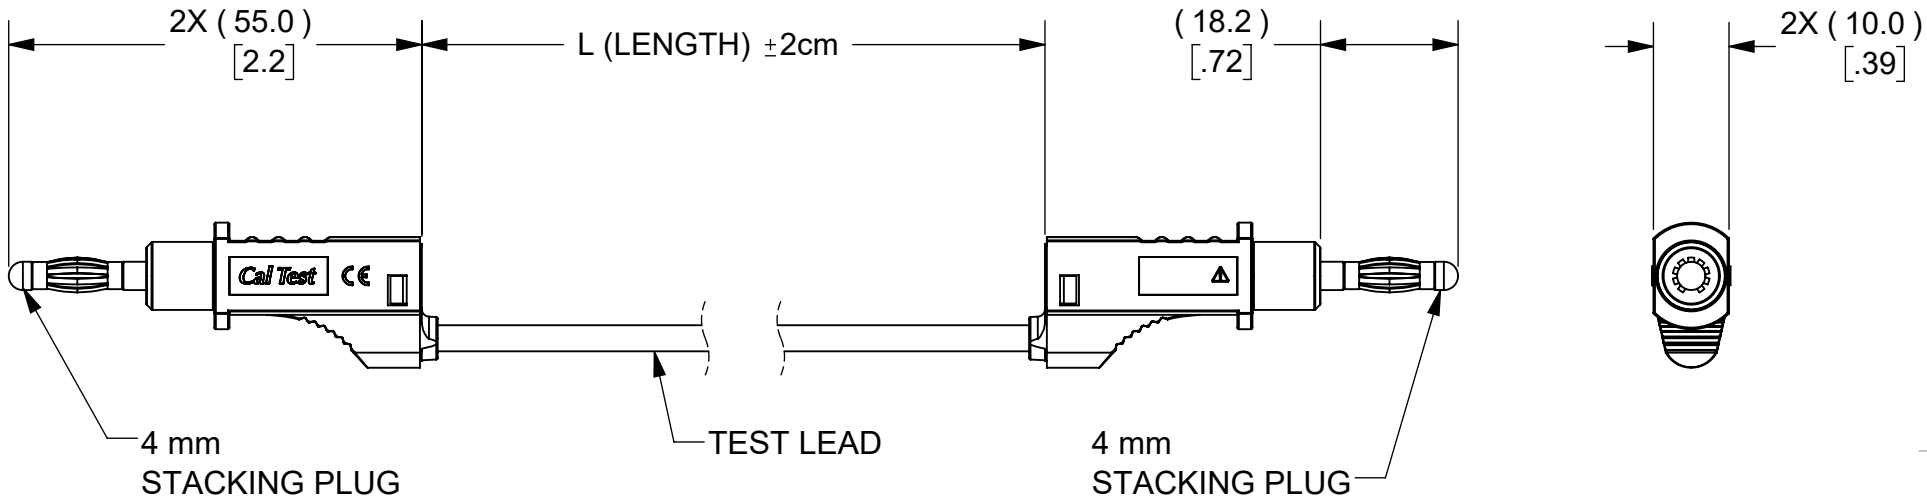

MODEL NUMBER
CT2131-L- #

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

LENGTH: (cm)

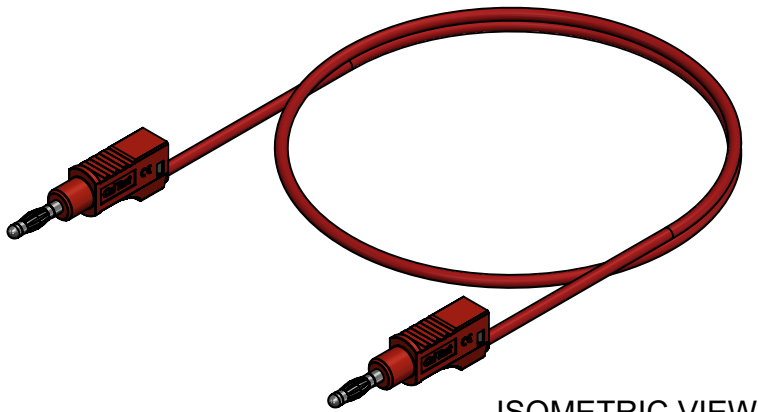

ISOMETRIC VIEW
SCALE 1:2
(RED SHOWN)

THIRD ANGLE PROJECTION				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING		PROJECT NO. A645(b)		METRIC		Cal TestELECTRONICS		22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA	
REFERENCE	MATERIAL SEE NOTES			APPROVALS		DATE		TITLE 4mm STACKING BANANA PLUG TEST LEAD, SILICONE JACKET					
	DRAWN GSG		10/17/2023										
	CHECKER B. HANSEN		10/17/2023										
	ENGR. B. HANSEN		10/17/2023										
	TREATMENT NONE		DESIGN ACTIVITY				SIZE B	CAGE CODE 43F45		DWG. NO. CT2131		REV. C	
FINISH SEE NOTES						SCALE 1:1		SHEET 1 OF 1					