
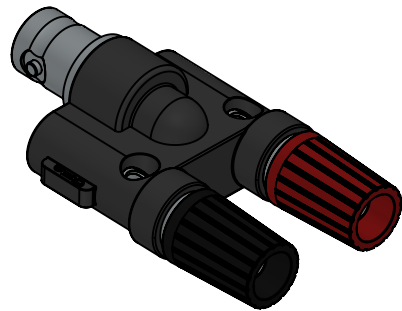


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASED - UPDATED TO METRIC FORMAT; ADDED NOTES 4 & 5.	7/24/2024	B. Hansen
B	UPDATED PRODUCT DRAWING TO LATEST CTE FORMAT; REFERENCED DIMENSION 19.0	7/31/2024	B. Hansen

NOTES:

- ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
- ADAPTER TO MEET OR EXCEED ALL SPECIFICATIONS PER MIL-PRF-39012.
- MATING DIMENSIONS IN ACCORDANCE WITH MIL-STD-348.
- MATERIAL:
 - BNC BODY: BRASS, NICKEL PLATED
 - BNC DIELECTRIC: DELRIN
 - BNC CENTER CONTACT: BRASS, GOLD PLATED
 - PLUG BODY: BRASS, NICKEL PLATED
 - CAGE CONTACT: BERYLLIUM COPPER NICKEL PLATING
 - INSULATOR: POLYAMIDE (NYLON), BLACK
- ELECTRICAL:
 - WORKING VOLTAGE: 500 V
 - MAXIMUM CURRENT: 3 A
 - RESISTANCE: < 1 mΩ
- MECHANICAL:
 - TEMPERATURE: -20°C TO +80°C
- STANDARD PACKAGING: 5 PCS PER PACK
- RoHS 2 AND REACH COMPLIANT

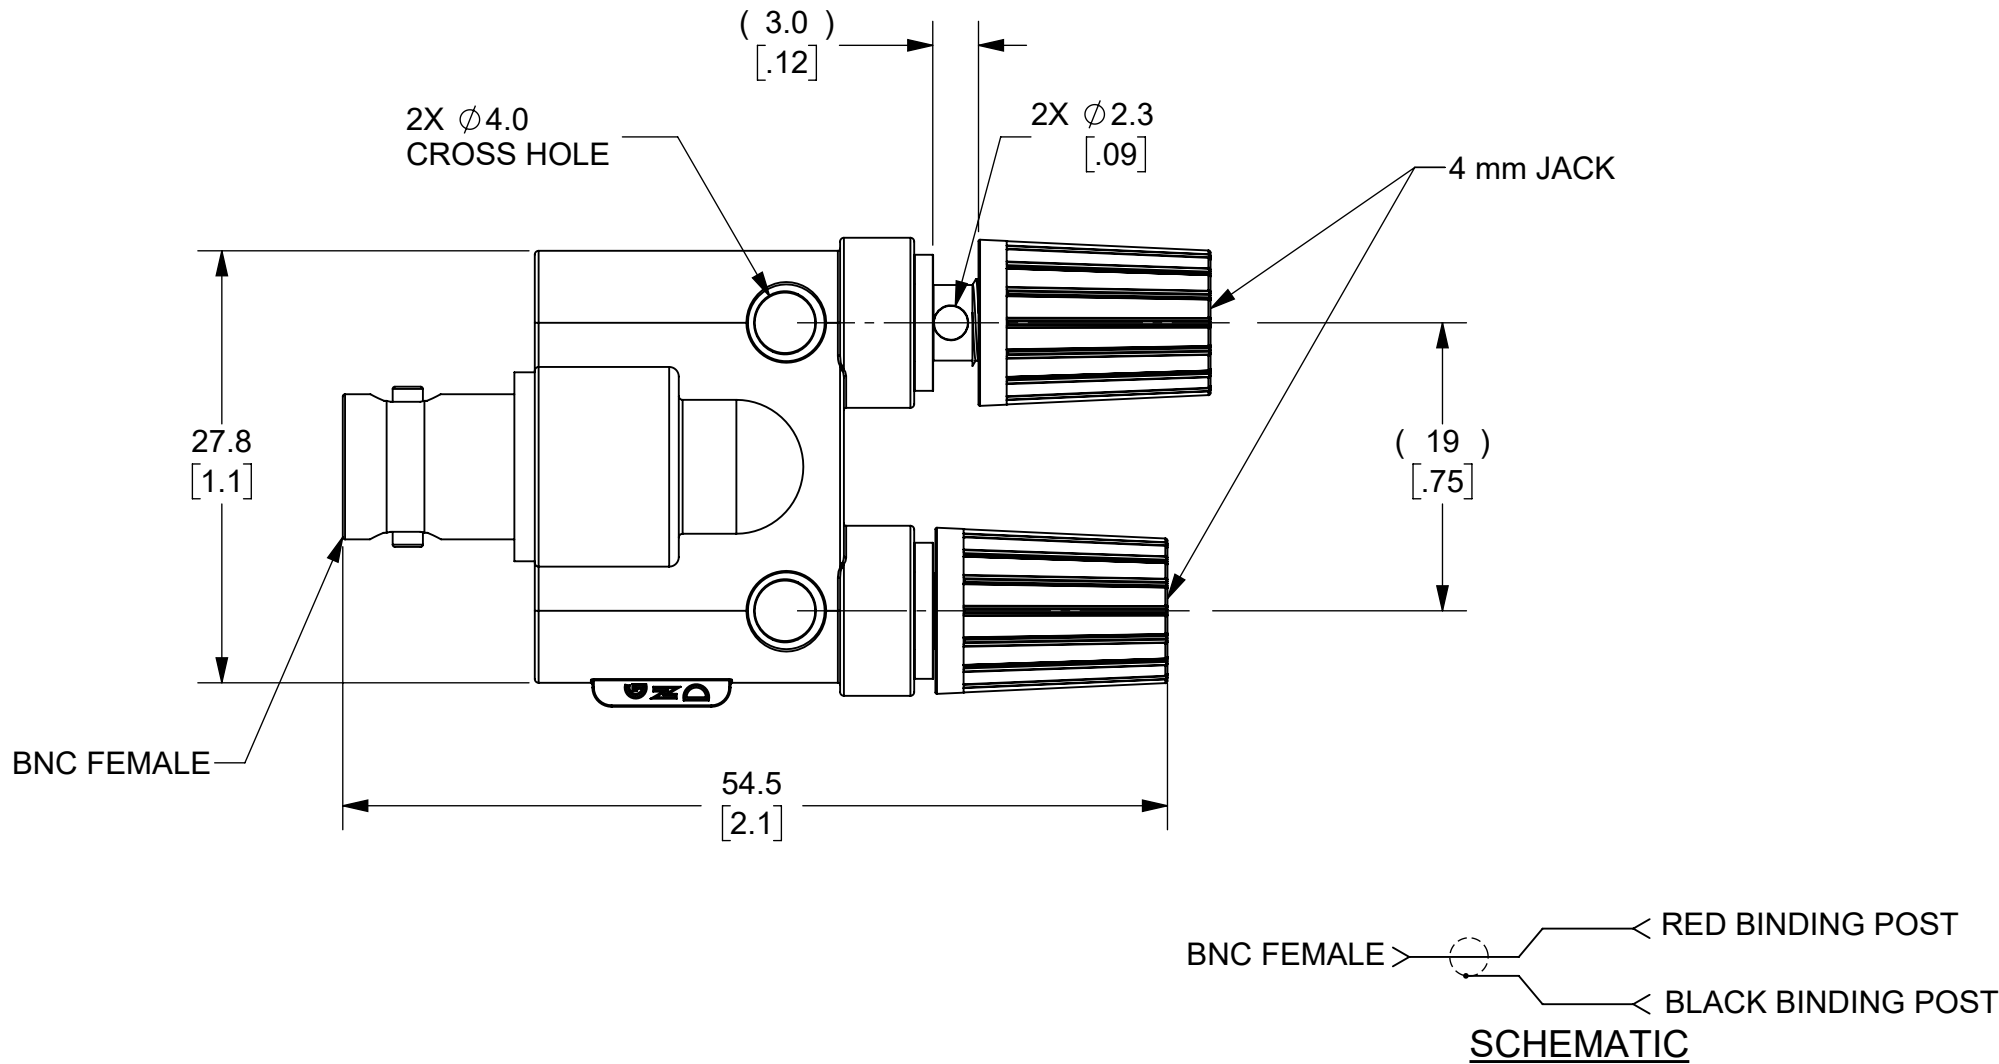

ISOMETRIC VIEW
FULL SCALE

CT2941		BNC FEMALE		-	
MODEL NUMBER		CONFIGURATION		NOTES / REFERENCE	
MODEL NUMBER TABLE					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.8 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING MATERIAL SEE NOTES TREATMENT NONE FINISH SEE NOTES		PROJECT NO.		METRIC Cal Test ELECTRONICS  22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA	
		APPROVALS			
		DRAWN		GSG	3/19/2024
		CHECKER		B. HANSEN	3/19/2024
		ENGR.		B. HANSEN	3/19/2024
DESIGN ACTIVITY					

22820 Savi Ranch Prky.
Yorba Linda, CA 92887
USA

METRIC

Cal Test
ELECTRONICS

22820 Savi Ranch Prky.
Yorba Linda, CA 92887
USA