
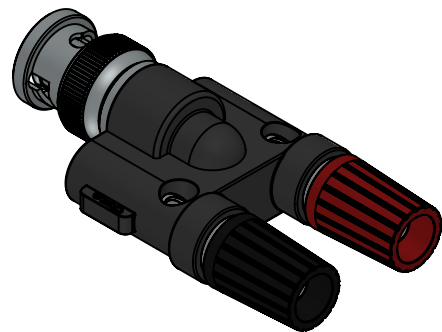


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASED - UPDATED TO METRIC FORMAT; ADDED NOTES 4 & 5.	7/24/2024	B. Hansen
B	UPDATED PRODUCT DRAWING TO LATEST CTE FORMAT; REFERENCED DIMENSION 19.0	7/31/2024	B. Hansen


NOTES:

- ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
- ADAPTER TO MEET OR EXCEED ALL SPECIFICATIONS PER MIL-PRF-39012
- MATING DIMENSIONS IN ACCORDANCE WITH MIL-STD-348.
- MATERIAL:
 - BNC BODY: BRASS, NICKEL PLATED
 - BNC DIELECTRIC: DELRIN
 - BNC CENTER CONTACT: BRASS, GOLD PLATED
 - BINDING POST CONTACT: BRASS, NICKEL PLATED
 - INSULATOR: POLYAMIDE (NYLON) BLACK
 - BINDING POST CAP: NYLON
- ELECTRICAL:
 - WORKING VOLTAGE: 500 V
 - MAXIMUM CURRENT: 3 A
 - RESISTANCE: < 1 mΩ
- MECHANICAL:
 - TEMPERATURE: -20°C TO +80°C
- STANDARD PACKAGING: 5 PCS PER PACK.
- RoHS AND REACH COMPLIANT

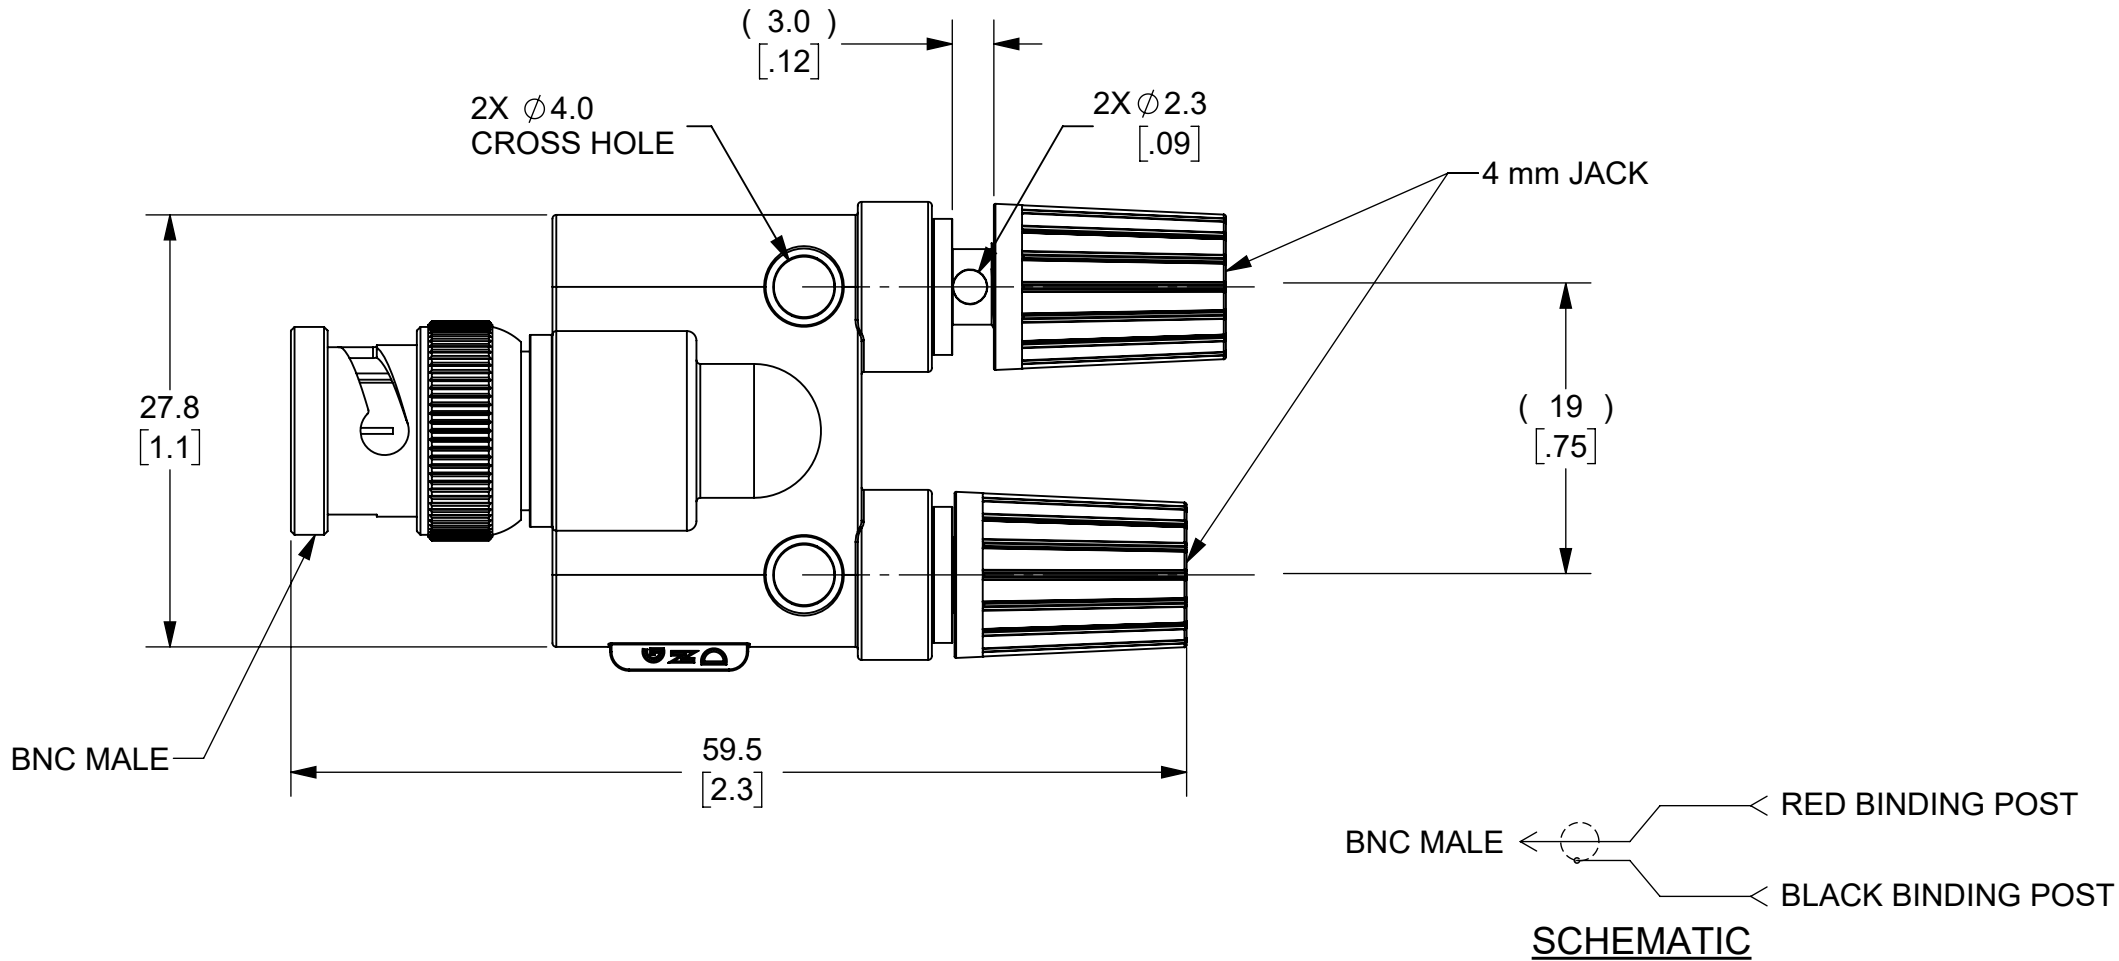

ISOMETRIC VIEW
FULL SCALE

THIRD ANGLE PROJECTION



REFERENCE

CT2410		BNC MALE		-		
MODEL NUMBER		CONFIGURATION		NOTES / REFERENCE		
MODEL NUMBER TABLE						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING	PROJECT NO.		METRIC		Cal TestELECTRONICS 22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA	
	APPROVALS					DATE
	DRAWN GSG		6/4/2024	ADAPTER, BNC MALE / 4mm BINDING POSTS		
	CHECKER B. HANSEN		6/4/2024			
	ENGR. B. HANSEN		6/4/2024			
	DESIGN ACTIVITY					
MATERIAL SEE NOTES			SIZE B	CAGE CODE 43F45	DWG. NO. CT2410	REV. B
TREATMENT NONE			SCALE 2:1		SHEET 1 OF 1	
FINISH SEE NOTES						